

**DECLARATION OF PERFORMANCE  
 NO. 3CPR**

1. Unique identification code of the product type:  
**Dry-pressed ceramic tiles with low water absorption  $0.5\% < E \leq 3\%$  EN 14 411 BI<sub>b</sub> attachment H,  
 Facade stone – GL, UGL**

2. Intended use(s):  
**For tiling walls indoors and/or outdoors, in buildings and production facilities**

3. Manufacturer:  
**CERRAD Sp. z o.o.  
 Ul. Radomska 49B  
 27-200 Starachowice**

4. System(s) of assessment and verification of constancy of performance: **System 4**

5. Harmonized standard: **PN EN 14411:2013-04**

Notified body(ies): **Institute of Ceramics and Building Materials – Warsaw**

6. Declared performances:

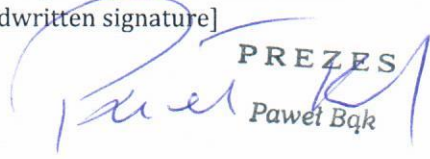
Key properties	Performances	Harmonized technical specification
Reaction to fire	AI Class, not tested (decision 96/603/EEA as further amended)	PN EN 14411:2013-04
Release of hazardous substances:		
- Cadmium	<0.07 mg/dm <sup>2</sup>	
- Lead	<0.8 mg/dm <sup>2</sup>	
Bond strength/adhesion		
- cement adhesive	No performance determined	
- dispersion adhesive	No performance determined	
- epoxy resin	No performance determined	
- masonry mortar	No performance determined	
Thermal shock resistance	Meets the requirements	
Durability for:		
- indoor use:	Meets the requirements	
- outdoor use: freeze-thaw resistance	Meets the requirements	

Performances of the product described above meet the declared performances. This declaration of performance is issued in accordance with the regulation (EU) no 305/2011 under the sole responsibility of the manufacturer indicated above.

On behalf of the manufacturer:

Paweł Bąk – President of the Board  
 [handwritten signature]

Starachowice, no. 01, 05/18/2018

  
**PREZES**  
 Paweł Bąk